



Gleipnir Banana Block - Roller Sheave



- ✓ Designed to maintain the specified Minimum Bend Radius (MBR) for guide cables, hoses, and umbilicals
- ✓ No loose components, design according to SfS Recommendation 024E/2018 for offshore safety
- ✓ Can be either selected from standard items or custom-made
- ✓ Compatible with shackles, pad eyes, and swivels for flexible installation
- ✓ Easily replaceable rollers equipped with sliding or roller bearings
- ✓ Certification can be provided upon request

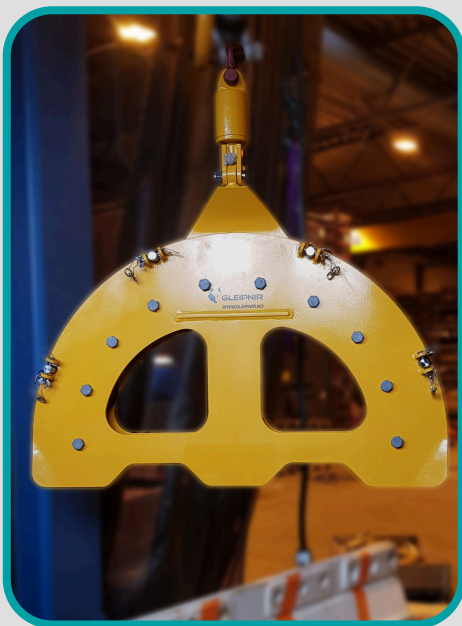

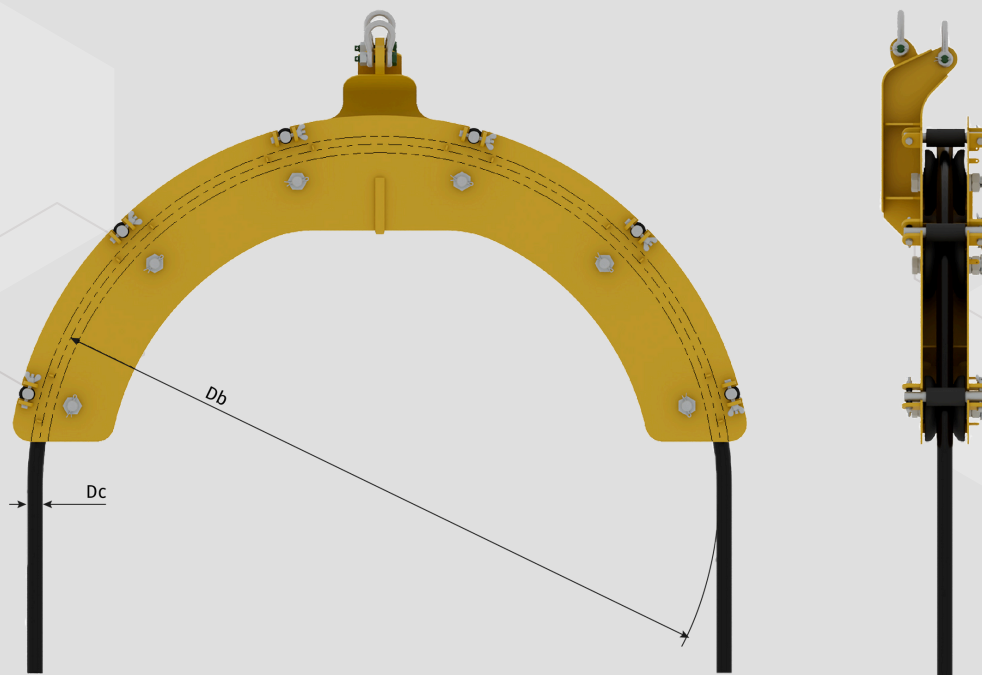

Article No.	Bending diameter Db [mm]	For cable diameter Dc [mm]	SWL in headfitting [T]	Number of rollers
08713-1	Ø1828	Ø44,5	2	6
02440-1	Ø1620	Ø48,3	2	10
03532-0	Ø960/Ø1540	Ø49/Ø79	2	6/8
06383-0	Ø1210	Ø19,2	2,5	10
06220-0	Ø1200	Ø19,2	5	10
01717-1	Ø1620	Ø95	6	10
05533-0	Ø1540	Ø35,6	6	10
06530-0	Ø1345	Ø33,2	7	8
05155-1	Ø1540	Ø50-52	8	10
08500-0	Ø1600	Ø84,5	10	10
05740-1	Ø2100	Ø26,4 - 350	10,6	16
06368-0	Ø910	Ø48	20	8
06375-0	Ø1710	Ø90	20	10
06421-0	Ø1714	Ø80,5	20	10
06975-1	Ø1030	Ø104	20	10
07397-1	Ø2320	Ø124	20	12
05880-2	Ø1940	Ø92	20	10
07656-0	Ø2400	Ø96	20	12
05810-3	Ø2220	Ø114	20	10