Heavy Duty Snatch Block

- **Available in various types and configurations -** can be either selected from standard items or custom-made
- **Designed for easy reeving,** as one of its side plates can be opened while the block is hanging
- **Compatible with shackles, pad eyes, and swivels for flexible installation.**
- **Designed with no loose components** and manufactured in accordance with **SfS Recommendation 024E/2018**, for safety in offshore applications.
- **Delivered with Certificate of Conformity**, third-partyparty certification can be provided upon request
- **Full material traceability on all load-bearing components**
- **Protective coating applied in accordance with ISO 12944 requirements**, system C5-M (marine environment)

www.gleipnir.no
www.wcl.no

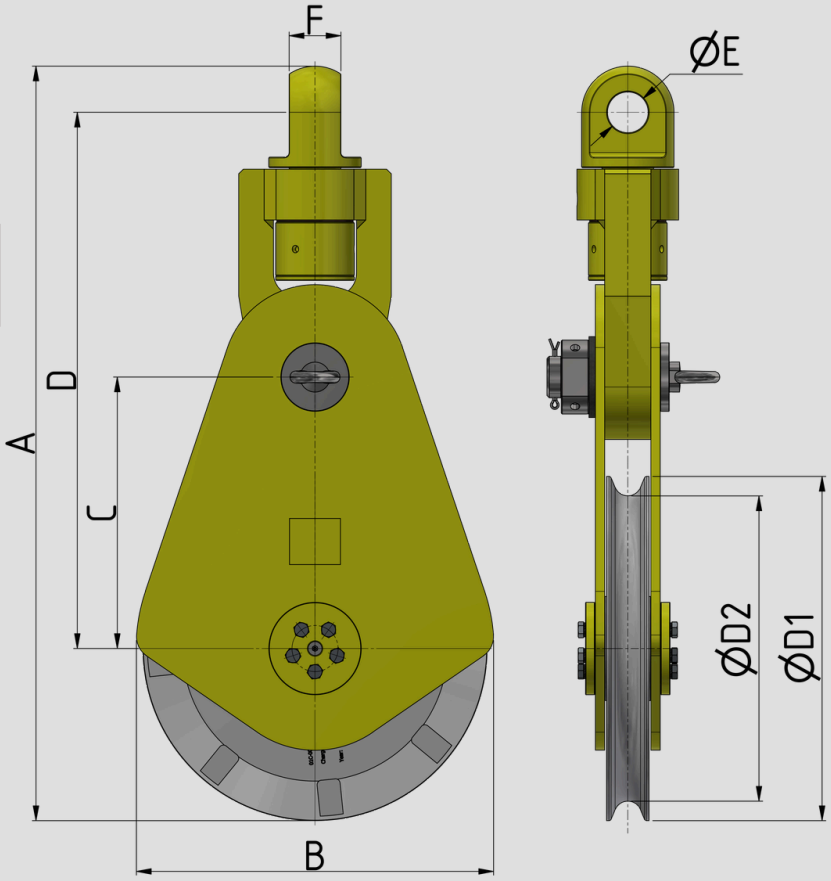

Article No.	WL in headfitting	Wire diameter	ØD1	ØD2	A	B	C	D	ØE	F	Weight	Shackle
	[T]	[mm]	[mm]								[kg]	[T]
09352-0	4,75	10-16	300	260	722	305	250	537	25	25	46	WLL 4.75
09354-0	12	14-22	370	320	836	374	315	603	37	45	81	WLL 12
08266-0	10	16-22	450	380	912	545	450	612	54	60	183	WLL 25
09356-0	20-25	20-28	555	480	1200	560	430	856	61	65	206	WLL 35
09358-0	30	24-32	645	560	1300	645	480	906	61	65	245	WLL 35
05161-0	80	28-36	745	660	1633	773	588	1160	88	110	486	WLL 85
03637-0	20	16-20	440	379	904	440	305	621	52	64	117	WLL 25
09360-0	40	36-38	357	289	922	366	331	674	60	80	130	WLL 42,5
09362-0	55	60	610	476	1477	610	530	1057	61	72	472	WLL 55
03620-0	70,5	24-36	725	625	1542	725	530	1062	75	90	490	WLL 85
06532-0	150	40	910	760	2107	910	688	1382	100	130	939	WLL 150