

Gleipnir Standard Sheaves



CRANE / HEAVY DUTY SHEAVES




PLASTIC / COMPOSITE SHEAVES



STAINLESS SHEAVES




STANDARD SHEAVES

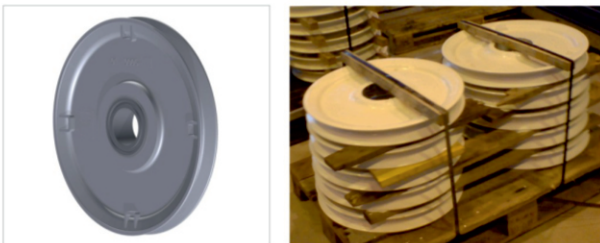

TRAWL SHEAVES




DRILLING SHEAVES



Gleipnir Standard Sheaves


Type 1 sheave:

- Standard specifications:
- Design temperature - 20 °C
 - 100 % material traceability
 - Offshore / marine surface conservation. RAL 9010
 - Cylindrical roller bearing

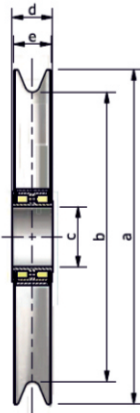

Type 2 sheave:

- Standard specifications:
- Design temperature - 20 °C
 - 100 % material traceability
 - Offshore / marine surface conservation. RAL 9010
 - Cylindrical roller bearing

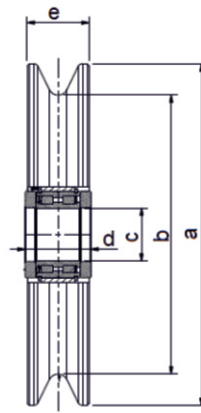

Type 3 sheave:

- Standard specifications:
- Design temperature - 20 °C
 - 100 % material traceability
 - Offshore / marine surface conservation. RAL 9010
 - spherical roller bearings

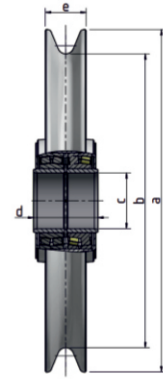


TABLE OF GLEIPNIR STANDARD SHEAVES

Max. wire load (T)	Wire sizes (mm)	a	b	c	d	e	Article	Sheave type	Weight (kg)
5	ø10 - ø16	ø 300	ø 260/ø 270	ø 50	40	34	01-0002	Type 1	7
9	ø14 - ø22	ø 370	ø 320/ø 330	ø 70	54	46	01-0003	Type 1	13,5
12	ø16 - ø22	ø 440	ø 380	ø 70	54	50	01-0004	Type 1	22
20	ø20 - ø28	ø 555	ø 480	ø 100	67	62	01-0005	Type 1	37,5
25	ø24 - ø32	ø 645	ø 560	ø 110	80	72	01-0006	Type 1	60
35	ø28 - ø36	ø 740	ø 640	ø 130	95	85	01-0007	Type 1	99
6,5	ø16 - ø20	ø 355	ø 290	ø 55	68	64	09-0001	Type 2	15
14	ø20 - ø28	ø470	ø 400	ø 85	70	66	09-0002	Type 2	25
8,5	ø16 - ø22	ø 400	ø 345	ø 55	68	64	09-0003	Type 2	23
42,5	ø24 - ø36	ø 725	ø 615	ø 130	150	88	03-0001	Type 3	98
45	ø24 - ø40	ø 800	ø 685	ø 130	150	88	01679-3	Type 3	167